

操作パネル延長コード / Control Panel Extension Cord

E4000-PEX4

取扱説明書 / OPERATION MANUAL

日本語：P1 - P3 / English：P5 - P7

OM-K0598 002

Thank you for purchasing Control Panel Extension Cord E4000-PEX4. This Control Panel Extension Cord is designed for can be away placed from the E4000 CONTROLLER main body. Read this and E4000 CONTROLLER Operation Manuals carefully before use. Always keep this Operation Manual in a place where a user can referred to for reference at any time.

1. SPECIFICATIONS

1 - 1 Specifications

Product Name	Control Panel Extension Cord
Model	E4000 - PEX4
Applicable CONTROLLER	E4000 CONTROLLER
Front Panel Dimensions	73mm × 73mm
Attachable Pitch	63mm × 63mm
Attachable Hole Dimensions	φ 3.4mm
Cord Length	4m

	Temperature	Humidity	Atmospheric Pressure
Operation Environment	0 - 40°C	MAX.75% (No condensation)	700 - 1,060hPa
Transportation and Storage Environment	-10 - + 50°C	10 - 85%	500 - 1,060hPa

1 - 2 Standard Accessories

Standard Accessories	
• Mounting Screw (M3) • • 4pcs.	• Operation Manual • • 1set.

1 - 3 Outside View of the Control Panel

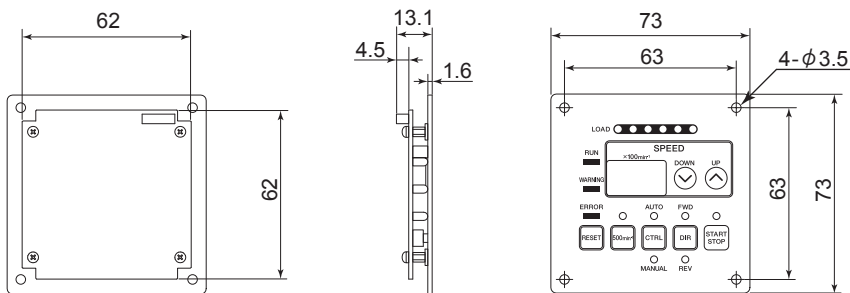


Fig. 1

2. INSTALATION OF THE CONTROL PANEL EXTENSION CORD

⚠ WARNING

- Turn OFF the Main Power Switch of the CONTROLLER before attaching the Control Panel Extension Cord.
- When attaching the Control Panel, protect the Control Panel from oil and other contaminants.
- Take care when selecting routing of cord of Control Panel to insure that the cord is not routed near potential sources of RF noise.
- Attach the Control Panel in manner to insure that the back of the circuit board of the Control Panel does not contact any object or surface that could cause potential short circuit.

- ① Remove the Mounting Screw (4pcs.) of the Control Panel and remove the Control Panel to front.

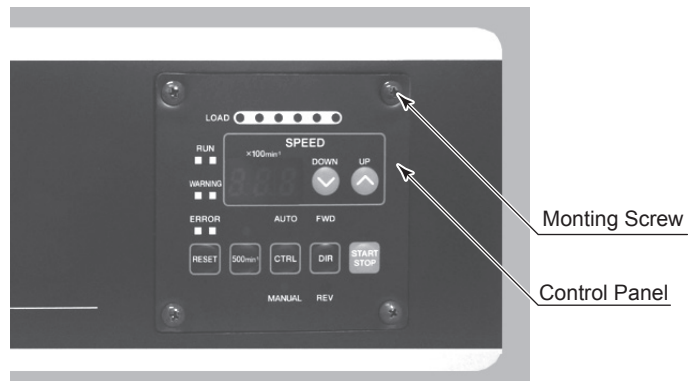


Fig. 2

- ② Remove the connector of the Control Panel (Fig. 3) and remove the Control Panel (Fig. 4).

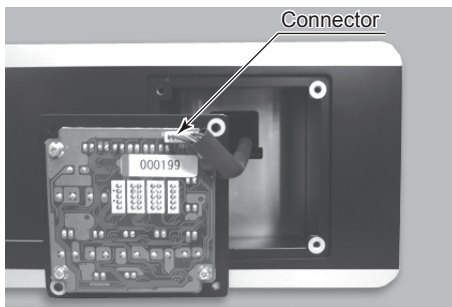


Fig. 3



Fig. 4

- ③ Connect the connector of the Front Panel of the Control Panel Extension Cord to the connector of the CONTROLLER (Fig. 5).

Attach the Front Panel of the Control Panel Extension Cord to CONTROLLER by Mounting Screw of the Control Panel (Fig. 6).

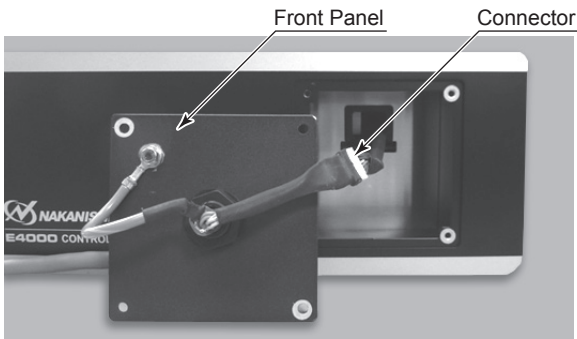


Fig. 5

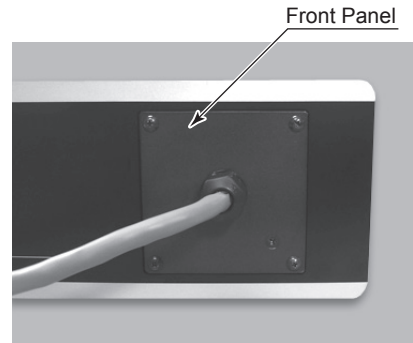


Fig. 6

- ④ Connect the connector of the Control Panel Extension Cord to the connector of the Control Panel (Fig. 7).

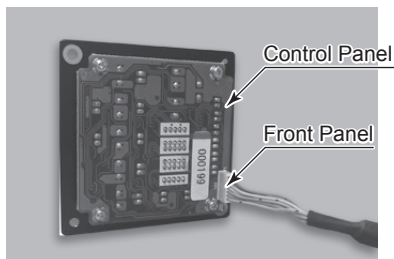


Fig. 7

- ⑤ Fasten the Control Panel for CONTROLLER to your order box or Control Panel Box (Option) by using the Mounting Screw (4pcs : Standard Accessories). Turn Control power ON and verify the CONTROLLER is operating correctly.

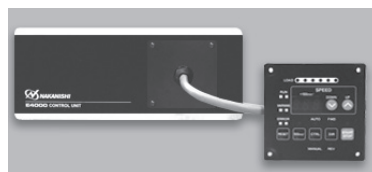


Fig. 8

3. DISPOSAL OF THIS PRODUCTS

When disposal of E4000-PEX4 is necessary, follow the instructions from your local government agency for proper disposal of electrical components .

株式会社ナカニシ

〒322-8666
栃木県鹿沼市下日向700
TEL: 0289-64-3380
FAX: 0289-62-5636
www.nakanishi-inc.com

NAKANISHI INC. 

700 Shimohinata, Kanuma
Tochigi 322-8666
Japan
www.nakanishi-inc.com

NSK America Corp.

1800 Global Parkway
Hoffman Estates
IL 60192, USA
www.nskamericacorp.com

NSK Europe GmbH 

Elly-Beinhorn-Strasse 8
65760 Eschborn
Germany

NSK United Kingdom Ltd.

UK Authorised Representative
Office 4, Gateway 1000
Arlington Business Park, Whittle Way
Stevenage, SG1 2FP, UK